


# CRUSH LIKE A BOSS.

Reversible blades

Two frontal penetration teeth

Speed multiplier valve

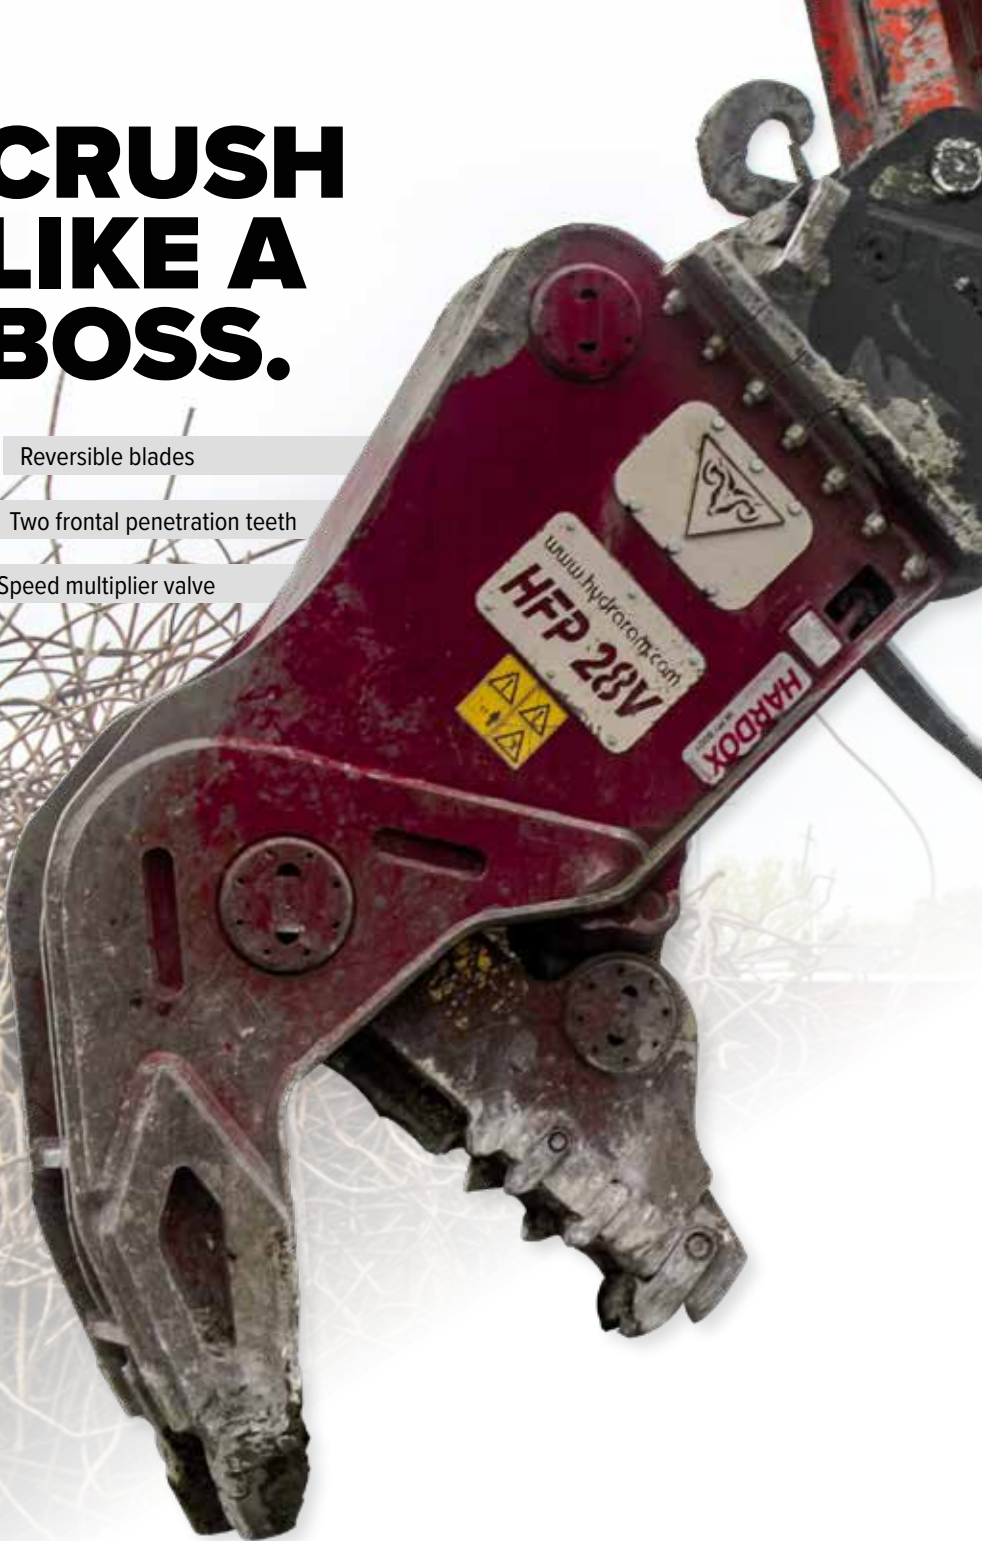

## HFP SERIES Fixed pulverizers

The Hydraram HFP-Pulverizer is specially designed for the secondary demolition of buildings and recycling. The shape of the jaws of the crusher is designed to pick up and crush concrete as effectively as possible. The steel cutters in the back of the pulverizers' jaw can cut reinforcement steel easily. Interchangeable teeth are standard on all models.

This tool is made the most most durable steel HARDOX-400® with an extremely high wear resistance, resulting in minimum maintenance and a long lifespan.

The installed speed valve ensures quick work cycles and immediate results.



FIXED PULVERIZERS			HFP-4V	HFP-7V	HFP-15V	HFP-22
Excavator class <sup>1</sup>	t		4 - 7	6 - 10	13 - 17	18 - 25
Weight	kg		460	740	1420	2180
Jaw opening	mm		-	475	690	810
Cutter length	mm		-	140	220	260
Working pressure	bar		-	280	350	350
Oilflow at open/close	l/min		-	40 - 60	120 - 200	200 - 300
Open/close	sec.		-	3.4 / 5.3	2.0 / 2.6	2.0 / 2.7

FIXED PULVERIZERS			HFP-28V	HFP-35V	HFP-48V	HFP-72V
Excavator class <sup>1</sup>	t		25 - 32	33 - 45	42 - 68	65 - 85
Weight	kg		2820	3420	4760	6980
Jaw opening	mm		870	950	1100	1250
Cutter length	mm		260	260	300	325
Working pressure	bar		350	350	350	350
Oilflow at open/close	l/min		250 - 350	300 - 400	350 - 500	450 - 600
Open/close	sec.		3.0 / 3.2	2.8 / 2.7	2.6 / 2.9	3.0 / 3.7

<sup>1</sup> Recommended excavator / attachment combination

