
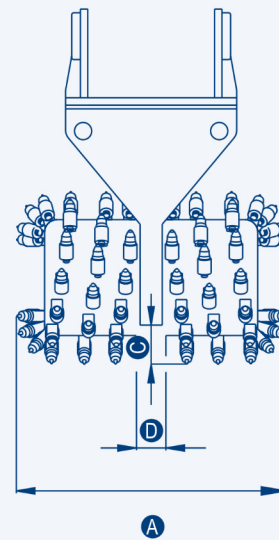
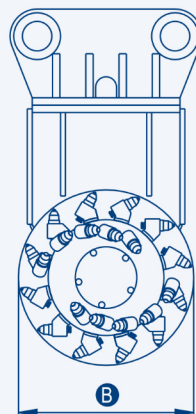


HIGH PERFORMANCE

Integrated high-displacement hydraulic radial piston motor to ensure **high performance** and **high rotation torque**.

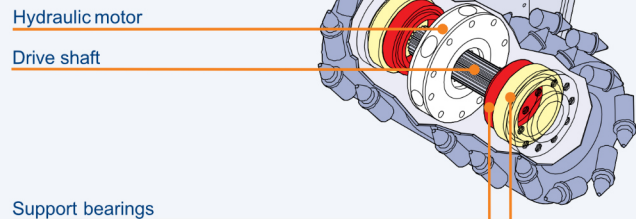

SPECIFICATIONS

	TF 1000	
A (standard drums)	900	mm
A (wall profiling)	1200	mm
B	660	mm
C	110	mm
D	160	mm
Excavator weight (1)	20 - 34	ton
Hydraulic motor power	87 - (118)	kw (cv)
Required oil pressure (2)	350 - 210	BAR
Required oil flow (3)	150 - 250	l/min
Max torque	15,6	KNm
Max cutting force	47,3	KN
Weight (standard drum - no bracket)	1575	kg

(1) User is responsible for ensuring that the equipment meets the prime mover's specifications and weight requirements.

(2) The cutting force decreases at the pressure and/or oil capacity reduces.

(3) Number of revolutions and cutting speed decrease as the oil capacity reduce.